


Benthic Observation Survey System (BOSS) Specification Sheet

Principal Investigators: Rick Starr (MLML), Mary Gleason (TNC)

Project Manager: Chad Key (MBARI)

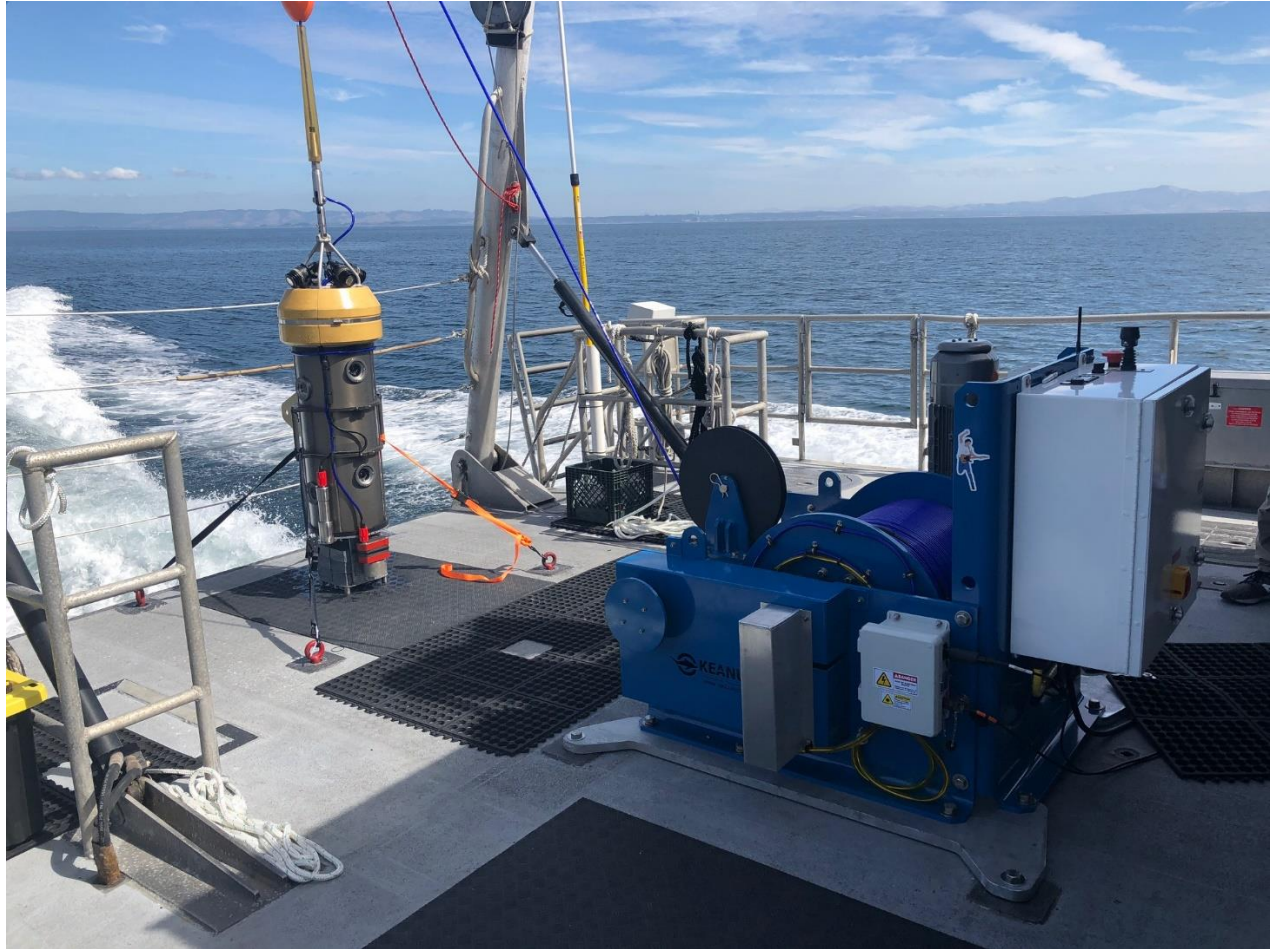

The Benthic Observation Survey System (BOSS) is a video collection platform designed to capture imagery in hard to reach subsea areas such as rocky outcroppings. Four sets of vertically mounted stereo pair cameras provide nearly 360 degrees of coverage. A ninth downward looking camera is used to assist with the positioning and landing of the BOSS on the seafloor. Live video from the nine cameras is streamed to the ship via the load-bearing tether; a topside deck recorder records all nine HD channels simultaneously. Real-time control of the BOSS is achieved with the use of the PDU and data collection laptop. Deployment of the BOSS can be accomplished with a science crew of 3-4 people; an additional ship's crew to operate the A-frame is also required.



Winch



Model: Okeanus Eco-2000

Description: Electric winch with Liebus shell, level wind, payout indicator, & remote belly pack.

Weight: 1250 pounds

Dimensions: W=52 inches, L=53 inches, H=43 inches

Power: 3HP

Electrical Input: 220VAC 60Hz, 10 amps (nominal, see below)

Tether Input: Electrical deck lead (480Vac) and optical deck lead (single mode fiber)

Fiber Optics: Alpha single optical pass slip ring (aluminum cover next to stationary junction box)

Line Speed: 121 feet/minute (full drum), 98 feet/min (bare drum)

Line Pull: 600 pounds (full drum), 750 pounds (bare drum)

Brake Holding Capacity: 1050 pounds (full drum), 1312 pounds (bare drum)

Pay-Out Current: 8 amps (peak), 6.2 amps (continuous)

Haul-In Current: 12.2 amps (peak), 10.5 amps (continuous)

Mounting: Attached feet (see above) with standard UNOLS pattern

Tether



Model: Falmat Xtreme-Marine EO PN# FM021814-2MODXX

Description: Reinforced Kevlar, 16AWG(x2), SMF(x2)

Length: 400 meters

Voltage Rating: 1000 volts

Operating Strength: 450 pounds

Breaking Strength: 2700 pounds

Minimum Bend Radius: 6 inches

Outer Diameter: 0.394 inches

Weight in Air: 0.26lbs/meter

Weight in Water: 0.9lbs/meter

Maximum Depth Rating: 6000 meters

Physical Connection to Lander: Esmet Load Bearing Fitting & weak link (break strength=2000lbs)

Electrical Connection to Lander: Junction Box (with Re-entrant cable compound – power + fiber)

BOSS Lander



Description: SubSea 9-camera benthic lander with 5 lights and altimeter/depth sensor.

Weight: Dry = ~350 lbs (with lead bricks), Dry=190 lbs (no bricks), Wet =140 lbs (with bricks)

Dimensions: H=72 inches, Diam = 12 inches

Housing Material: Anodized aluminum

Power: 1200W max

Input: 480Vac 60Hz, 2.5 amps

Deck Recorder (left) and PDU (right)



PDU

Description: Power and Control unit for BOSS

Weight: ~100 pounds

Dimensions: H=30 inches, W=30 inches, Length=24 inches

Power: 1200W (supplies power to lander)

Input: 110VAC, 12 amps

Deck Recorder

Description: Computer for recording the 9 HD video streams

Weight: ~150 pounds

Dimensions: H=12 inches, W=20 inches, Length=72 inches

Power: ~650W

Input: 110VAC, 6 amps

Sheave



Sheave is in upper portion of the photograph, attached to the ship's A-Frame.

Main Deployment Components

Back Deck

Winch (with tether)
BOSS Lander
Sheave
Launch and Recovery Tote (Football floats, Callum grip)
Clump Weights (50 pounds x 3)
GPS Antenna

Internal

Power Distribution Unit (PDU)
Deck Recorder (with monitor, keyboard, and mouse)
Viewing Monitors (3)
Data Acquisition Laptop
Navigational (Waypoint) Laptop
Safety gear

Other

Storage Totes (~6)
Tool Boxes (2)