


CAM210
Map1
Mosaic and points

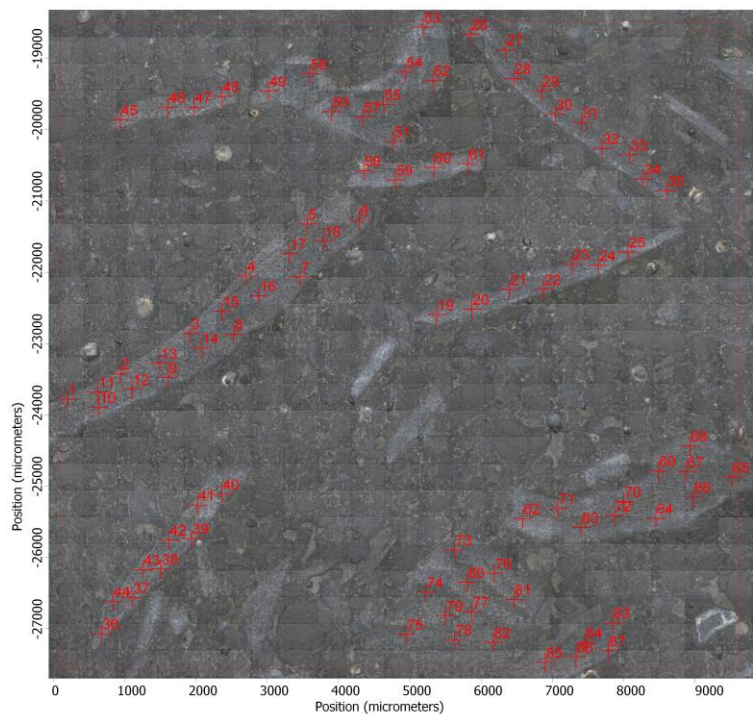

COLLECTION AND PROCESSING INFORMATION

Title: CAM210_map1

DATA COLLECTION INFORMATION

Number of sample scans: 64
Sampling interval: 12,49 sec
Resolution: 8,000
Levels of zero filling: 0
Number of scan points: 4384
Number of FFT points: 4096
Reference frequency: 15798,7 cm-1
Interferogram peak position: 2048
Apodization: Blackman-Harris
Number of background scans: 64
Background gain: 1,0

DATA DESCRIPTION

Number of points: 863
X-axis: Wavenumbers (cm-1)
Y-axis: Absorbance
First X value: 674,9918
Last X value: 3999,8086
Data spacing: 3,857096

SPECTROMETER DESCRIPTION

Spectrometer: Nicolet iN10 MX
Source: IR
Detector: MCT/A
Beamsplitter: KBr
Sample spacing: 2,0000
Digitizer bits: 24
Mirror velocity: 2,5317
Aperture: 150,00
Sample gain: 1,0
High pass filter: 200,0000
Low pass filter: 20000,0000

DATA PROCESSING HISTORY

Unknown


CURRENT DIGITAL SIGNATURE STATUS

Not currently signed.

MAP DESCRIPTION

Map type: Discrete points
Number of spectra: 87

CAM210
Map2
Mosaic and points

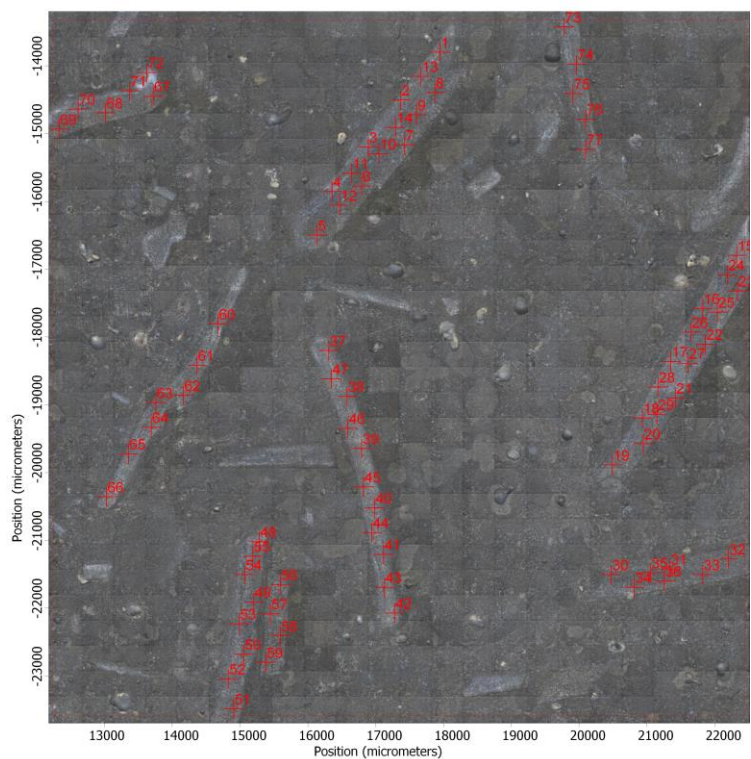

COLLECTION AND PROCESSING INFORMATION

Title: CAM210_map2

DATA COLLECTION INFORMATION

Number of sample scans: 64
Sampling interval: 12,48 sec
Resolution: 8,000
Levels of zero filling: 0
Number of scan points: 4384
Number of FFT points: 4096
Reference frequency: 15798,7 cm-1
Interferogram peak position: 2048
Apodization: Blackman-Harris
Number of background scans: 64
Background gain: 1,0

DATA DESCRIPTION

Number of points: 863
X-axis: Wavenumbers (cm-1)
Y-axis: Absorbance
First X value: 674,9918
Last X value: 3999,8086
Data spacing: 3,857096

SPECTROMETER DESCRIPTION

Spectrometer: Nicolet iN10 MX
Source: IR
Detector: MCT/A
Beamsplitter: KBr
Sample spacing: 2,0000
Digitizer bits: 24
Mirror velocity: 2,5317
Aperture: 150,00
Sample gain: 1,0
High pass filter: 200,0000
Low pass filter: 20000,0000

DATA PROCESSING HISTORY

Unknown


CURRENT DIGITAL SIGNATURE STATUS

Not currently signed.

MAP DESCRIPTION

Map type: Discrete points
Number of spectra: 77

CAM210
Map3
Mosaic and points

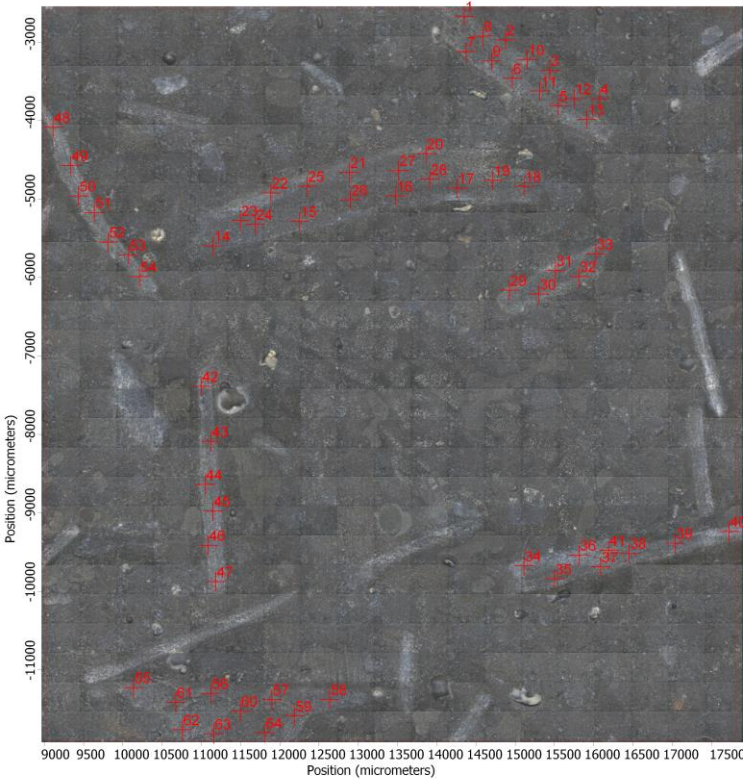

COLLECTION AND PROCESSING INFORMATION

Title: CAM210_map3

DATA COLLECTION INFORMATION

Number of sample scans: 64
Sampling interval: 12,49 sec
Resolution: 8,000
Levels of zero filling: 0
Number of scan points: 4384
Number of FFT points: 4096
Reference frequency: 15798,7 cm-1
Interferogram peak position: 2048
Apodization: Blackman-Harris
Number of background scans: 64
Background gain: 1,0

DATA DESCRIPTION

Number of points: 863
X-axis: Wavenumbers (cm-1)
Y-axis: Absorbance
First X value: 674,9918
Last X value: 3999,8086
Data spacing: 3,857096

SPECTROMETER DESCRIPTION

Spectrometer: Nicolet iN10 MX
Source: IR
Detector: MCT/A
Beamsplitter: KBr
Sample spacing: 2,0000
Digitizer bits: 24
Mirror velocity: 2,5317
Aperture: 150,00
Sample gain: 1,0
High pass filter: 200,0000
Low pass filter: 20000,0000

DATA PROCESSING HISTORY

Unknown


CURRENT DIGITAL SIGNATURE STATUS

Not currently signed.

MAP DESCRIPTION

Map type: Discrete points
Number of spectra: 64

CAM210
Map4
Mosaic and points

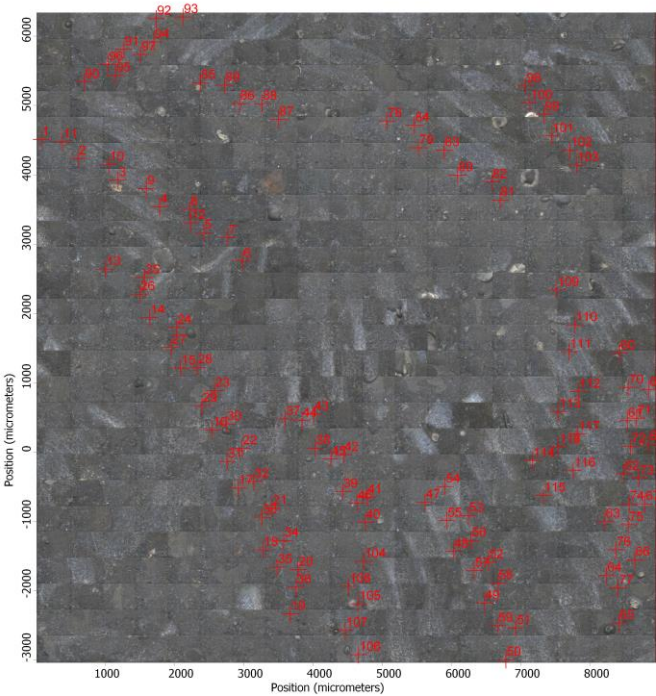

COLLECTION AND PROCESSING INFORMATION

Title: CAM210_map4

DATA COLLECTION INFORMATION

Number of sample scans: 64
Sampling interval: 12,48 sec
Resolution: 8,000
Levels of zero filling: 0
Number of scan points: 4384
Number of FFT points: 4096
Reference frequency: 15798,7 cm-1
Interferogram peak position: 2048
Apodization: Blackman-Harris
Number of background scans: 64
Background gain: 1,0

DATA DESCRIPTION

Number of points: 863
X-axis: Wavenumbers (cm-1)
Y-axis: Absorbance
First X value: 674,9918
Last X value: 3999,8086
Data spacing: 3,857096

SPECTROMETER DESCRIPTION

Spectrometer: Nicolet iN10 MX
Source: IR
Detector: MCT/A
Beamsplitter: KBr
Sample spacing: 2,0000
Digitizer bits: 24
Mirror velocity: 2,5317
Aperture: 150,00
Sample gain: 1,0
High pass filter: 200,0000
Low pass filter: 20000,0000

DATA PROCESSING HISTORY

Unknown


CURRENT DIGITAL SIGNATURE STATUS

Not currently signed.

MAP DESCRIPTION

Map type: Discrete points
Number of spectra: 118

CAM210
Map5
Mosaic and points

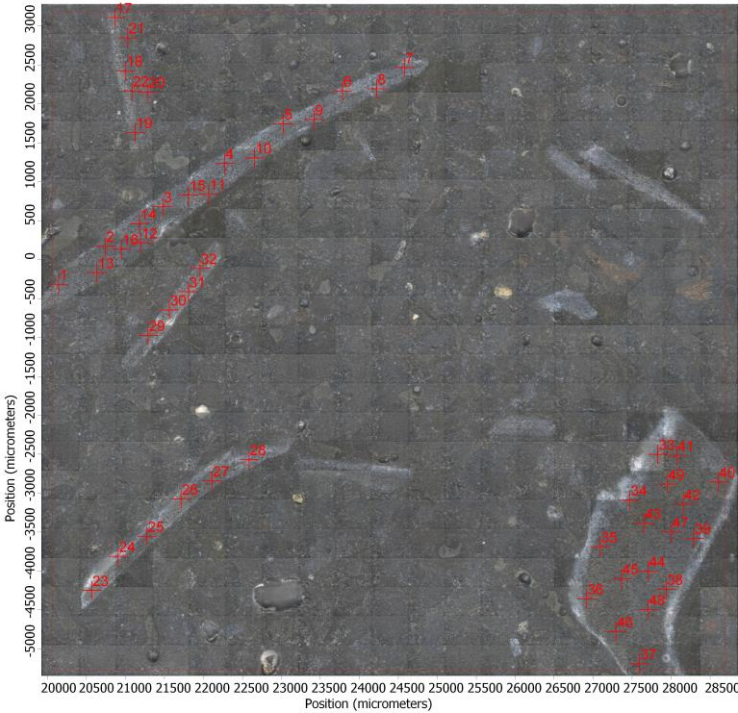

COLLECTION AND PROCESSING INFORMATION

Title: CAM210_map5

DATA COLLECTION INFORMATION

Number of sample scans: 64
Sampling interval: 12,49 sec
Resolution: 8,000
Levels of zero filling: 0
Number of scan points: 4384
Number of FFT points: 4096
Reference frequency: 15798,7 cm-1
Interferogram peak position: 2048
Apodization: Blackman-Harris
Number of background scans: 64
Background gain: 1,0

DATA DESCRIPTION

Number of points: 863
X-axis: Wavenumbers (cm-1)
Y-axis: Absorbance
First X value: 674,9918
Last X value: 3999,8086
Data spacing: 3,857096

SPECTROMETER DESCRIPTION

Spectrometer: Nicolet iN10 MX
Source: IR
Detector: MCT/A
Beamsplitter: KBr
Sample spacing: 2,0000
Digitizer bits: 24
Mirror velocity: 2,5317
Aperture: 150,00
Sample gain: 1,0
High pass filter: 200,0000
Low pass filter: 20000,0000

DATA PROCESSING HISTORY

Unknown


CURRENT DIGITAL SIGNATURE STATUS

Not currently signed.

MAP DESCRIPTION

Map type: Discrete points
Number of spectra: 49

CAM210
Map6
Mosaic and points

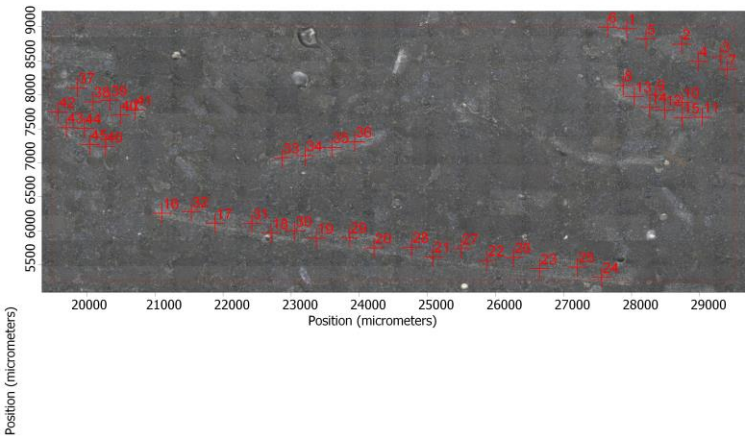

COLLECTION AND PROCESSING INFORMATION

Title: CAM210_map6

DATA COLLECTION INFORMATION

Number of sample scans: 64
Sampling interval: 12,49 sec
Resolution: 8,000
Levels of zero filling: 0
Number of scan points: 4384
Number of FFT points: 4096
Reference frequency: 15798,7 cm-1
Interferogram peak position: 2048
Apodization: Blackman-Harris
Number of background scans: 64
Background gain: 1,0

DATA DESCRIPTION

Number of points: 863
X-axis: Wavenumbers (cm-1)
Y-axis: Absorbance
First X value: 674,9918
Last X value: 3999,8086
Data spacing: 3,857096

SPECTROMETER DESCRIPTION

Spectrometer: Nicolet iN10 MX
Source: IR
Detector: MCT/A
Beamsplitter: KBr
Sample spacing: 2,0000
Digitizer bits: 24
Mirror velocity: 2,5317
Aperture: 150,00
Sample gain: 1,0
High pass filter: 200,0000
Low pass filter: 20000,0000

DATA PROCESSING HISTORY

Unknown


CURRENT DIGITAL SIGNATURE STATUS

Not currently signed.

MAP DESCRIPTION

Map type: Discrete points
Number of spectra: 46

CAM210
Map7
Mosaic and points

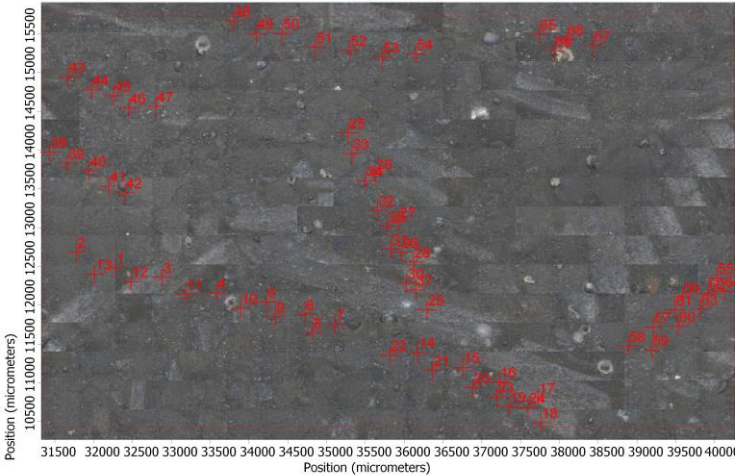

COLLECTION AND PROCESSING INFORMATION

Title: CAM210_map7

DATA COLLECTION INFORMATION

Number of sample scans: 64
Sampling interval: 12,49 sec
Resolution: 8,000
Levels of zero filling: 0
Number of scan points: 4384
Number of FFT points: 4096
Reference frequency: 15798,7 cm-1
Interferogram peak position: 2048
Apodization: Blackman-Harris
Number of background scans: 64
Background gain: 1,0

DATA DESCRIPTION

Number of points: 863
X-axis: Wavenumbers (cm-1)
Y-axis: Absorbance
First X value: 674,9918
Last X value: 3999,8086
Data spacing: 3,857096

SPECTROMETER DESCRIPTION

Spectrometer: Nicolet iN10 MX
Source: IR
Detector: MCT/A
Beamsplitter: KBr
Sample spacing: 2,0000
Digitizer bits: 24
Mirror velocity: 2,5317
Aperture: 150,00
Sample gain: 1,0
High pass filter: 200,0000
Low pass filter: 20000,0000

DATA PROCESSING HISTORY

Unknown


CURRENT DIGITAL SIGNATURE STATUS

Not currently signed.

MAP DESCRIPTION

Map type: Discrete points
Number of spectra: 68

CAM210
Map8
Mosaic and points

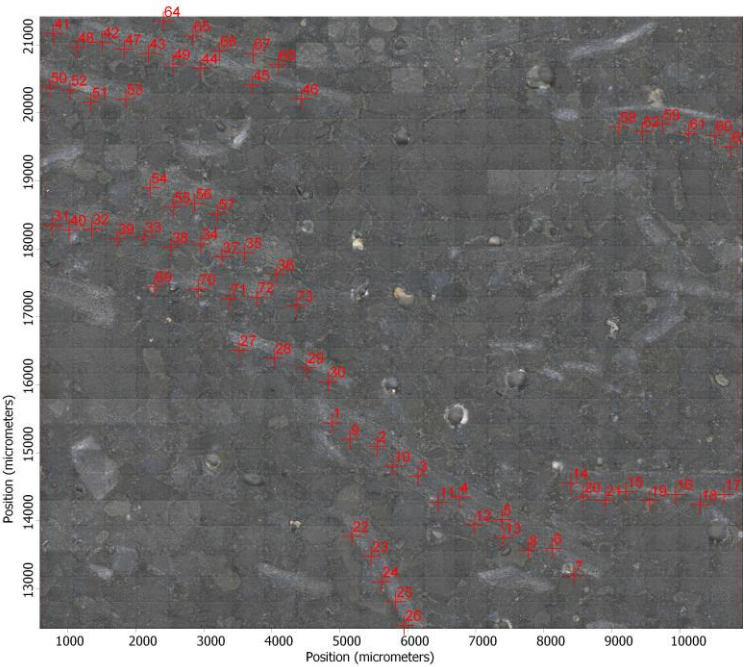

COLLECTION AND PROCESSING INFORMATION

Title: CAM210_map8

DATA COLLECTION INFORMATION

Number of sample scans: 64
Sampling interval: 12,48 sec
Resolution: 8,000
Levels of zero filling: 0
Number of scan points: 4384
Number of FFT points: 4096
Reference frequency: 15798,7 cm-1
Interferogram peak position: 2048
Apodization: N-B Strong
Number of background scans: 64
Background gain: 1,0

DATA DESCRIPTION

Number of points: 863
X-axis: Wavenumbers (cm-1)
Y-axis: Absorbance
First X value: 674,9918
Last X value: 3999,8086
Data spacing: 3,857096

SPECTROMETER DESCRIPTION

Spectrometer: Nicolet iN10 MX
Source: IR
Detector: MCT/A
Beamsplitter: KBr
Sample spacing: 2,0000
Digitizer bits: 24
Mirror velocity: 2,5317
Aperture: 150,00
Sample gain: 1,0
High pass filter: 200,0000
Low pass filter: 20000,0000

DATA PROCESSING HISTORY

Unknown


CURRENT DIGITAL SIGNATURE STATUS

Not currently signed.

MAP DESCRIPTION

Map type: Discrete points
Number of spectra: 73

CAM210
Map9
Mosaic and points

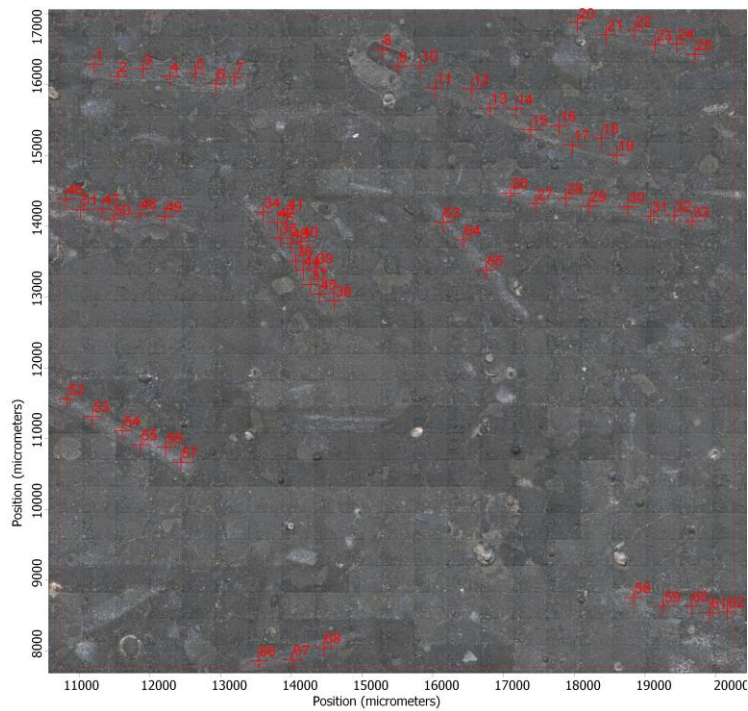

COLLECTION AND PROCESSING INFORMATION

Title: CAM210_map9

DATA COLLECTION INFORMATION

Number of sample scans: 64
Sampling interval: 12,49 sec
Resolution: 8,000
Levels of zero filling: 0
Number of scan points: 4384
Number of FFT points: 4096
Reference frequency: 15798,7 cm-1
Interferogram peak position: 2048
Apodization: N-B Strong
Number of background scans: 64
Background gain: 1,0

DATA DESCRIPTION

Number of points: 863
X-axis: Wavenumbers (cm-1)
Y-axis: Absorbance
First X value: 674,9918
Last X value: 3999,8086
Data spacing: 3,857096

SPECTROMETER DESCRIPTION

Spectrometer: Nicolet iN10 MX
Source: IR
Detector: MCT/A
Beamsplitter: KBr
Sample spacing: 2,0000
Digitizer bits: 24
Mirror velocity: 2,5317
Aperture: 150,00
Sample gain: 1,0
High pass filter: 200,0000
Low pass filter: 20000,0000

DATA PROCESSING HISTORY

Unknown


CURRENT DIGITAL SIGNATURE STATUS

Not currently signed.

MAP DESCRIPTION

Map type: Discrete points
Number of spectra: 68

CAM210
Map10
Mosaic and points

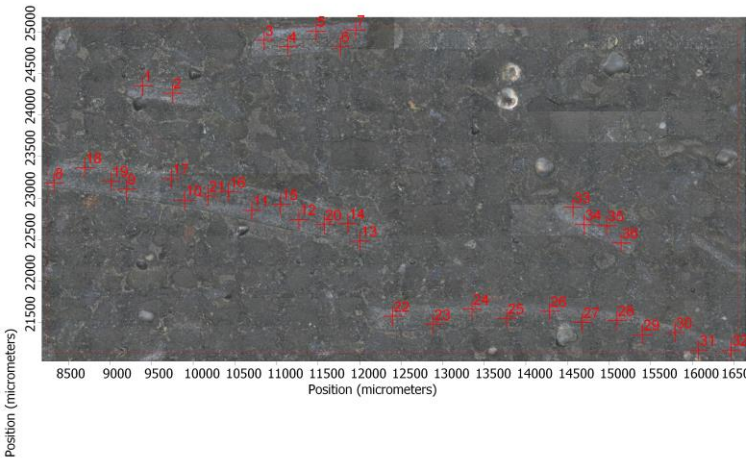

COLLECTION AND PROCESSING INFORMATION

Title: CAM210_map10

DATA COLLECTION INFORMATION

Number of sample scans: 64
Sampling interval: 12,49 sec
Resolution: 8,000
Levels of zero filling: 0
Number of scan points: 4384
Number of FFT points: 4096
Reference frequency: 15798,7 cm-1
Interferogram peak position: 2048
Apodization: N-B Strong
Number of background scans: 64
Background gain: 1,0

DATA DESCRIPTION

Number of points: 863
X-axis: Wavenumbers (cm-1)
Y-axis: Absorbance
First X value: 674,9918
Last X value: 3999,8086
Data spacing: 3,857096

SPECTROMETER DESCRIPTION

Spectrometer: Nicolet iN10 MX
Source: IR
Detector: MCT/A
Beamsplitter: KBr
Sample spacing: 2,0000
Digitizer bits: 24
Mirror velocity: 2,5317
Aperture: 150,00
Sample gain: 1,0
High pass filter: 200,0000
Low pass filter: 20000,0000

DATA PROCESSING HISTORY

Unknown


CURRENT DIGITAL SIGNATURE STATUS

Not currently signed.

MAP DESCRIPTION

Map type: Discrete points
Number of spectra: 36

CAM210
Map11
Mosaic and points

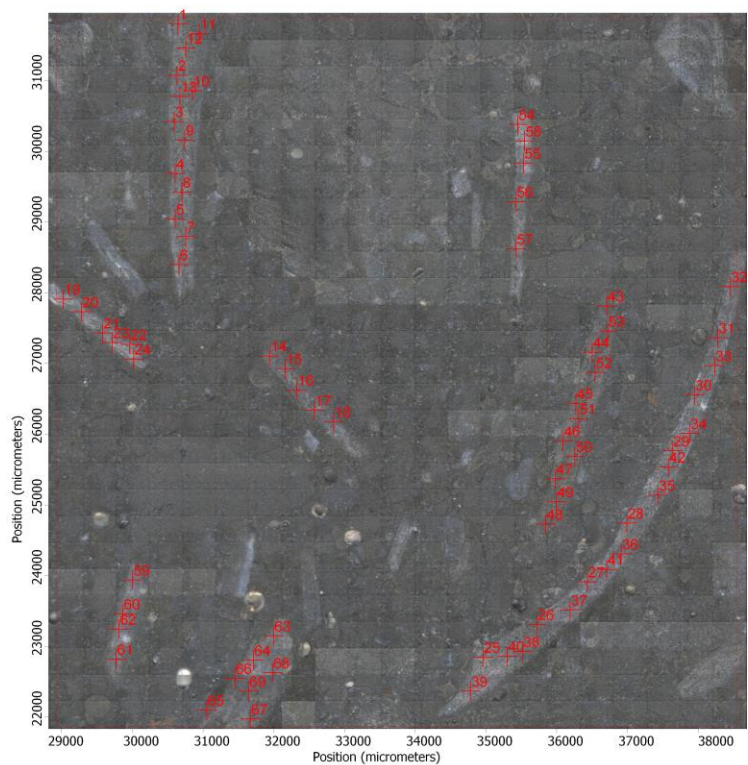

COLLECTION AND PROCESSING INFORMATION

Title: CAM210_map11

DATA COLLECTION INFORMATION

Number of sample scans: 64
Sampling interval: 12,49 sec
Resolution: 8,000
Levels of zero filling: 0
Number of scan points: 4384
Number of FFT points: 4096
Reference frequency: 15798,7 cm-1
Interferogram peak position: 2048
Apodization: N-B Strong
Number of background scans: 64
Background gain: 1,0

DATA DESCRIPTION

Number of points: 863
X-axis: Wavenumbers (cm-1)
Y-axis: Absorbance
First X value: 674,9918
Last X value: 3999,8086
Data spacing: 3,857096

SPECTROMETER DESCRIPTION

Spectrometer: Nicolet iN10 MX
Source: IR
Detector: MCT/A
Beamsplitter: KBr
Sample spacing: 2,0000
Digitizer bits: 24
Mirror velocity: 2,5317
Aperture: 150,00
Sample gain: 1,0
High pass filter: 200,0000
Low pass filter: 20000,0000

DATA PROCESSING HISTORY

Unknown

CURRENT DIGITAL SIGNATURE STATUS

Not currently signed.

MAP DESCRIPTION

Map type: Discrete points
Number of spectra: 69